

SEP 40

SEP Series – Previous generation



Visit our
website



04.2026

Technical Data

Press force	400 kN (available from 100 strokes/min)
Stroke rate	stepless up to 500 Hub/min
Distance between table and ram (with clamping plate), largest stroke at the bottom, adjustment at the top	255 mm
Ram adjustment	70 mm
Ram stroke – adjustable	8 – 70 mm
Ram surface (L x W)	340 × 320 mm
Drilled hole in the ram	Ø 40 × 80 mm
Fitting groove in the ram	30 H7 mm
Table surface (L x W)	550 × 580 mm
Mould dimensions (L x W)	510 × 480 mm
Clamping plate thickness	60 mm
Through-hole in the clamping plate (L x W)	400 × 160 mm
Through-hole in the table (L x W)	480/400 × 200 mm
Belt infeed above clamping surface	feed-dependent
Drive power	18,5 kW
Weight (without feed)	5400 kg
Dimensions (L x W x H)	1100 × 1050 × 2200 mm

Structure

- Press body in stable double-column mono-block design made of vibration-damping gray cast iron
- Eccentric shaft on roller bearings with adjustment stroke and rotating mass balance
- Air-cooled piston rod, mounted on the eccentric shaft with multi-row, heavy-duty caged roller bearings
- Press ram made of high-strength titanium alloyed cast Al, 6-fold backlash-free rolling bearing supported by linear roller bearings on hardened and ground guideways
- Press drive via frequency-controlled three-phase motor, flywheel and pneumatic clutch-brake combination
- Press sequence control in PLC technology
- Press control with cam controller, mould and press force monitoring
- Special/additional equipment possible at any time by technical arrangement
- The SEP 40 stamping press can be individually equipped with gripper or roller feeds pushing or pulling


Technical changes reserved.

SEP 40

SEP Series – Previous generation

SCHAAL
by Weil Technology


Dimensions

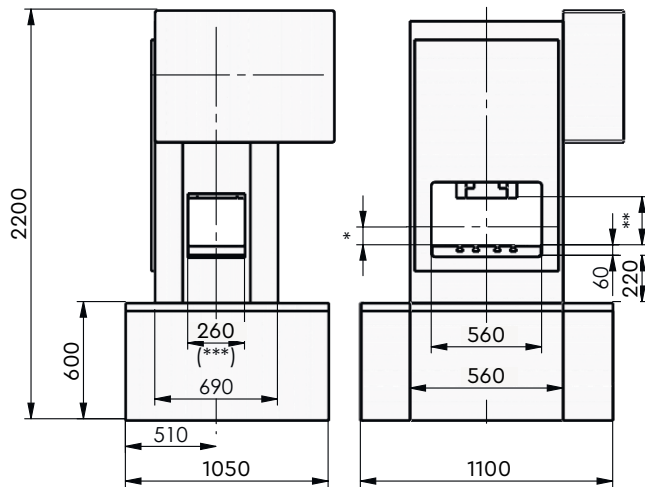

- * Belt infeed height above clamping surface on request (feed-dependent)
- ** Mould installation height (see table)
- *** The lateral passage on the press body is reduced to **200 mm** when a gripper feed is used (special widths on request)

Ram stroke in mm	Mould installation height min. – max	Permissible stroke rate depending on ram stroke
8	216 – 286	500
10	215 – 285	480
15	213 – 283	470
20	210 – 280	460
25	208 – 278	420
31	205 – 275	380
36	202 – 272	340
41	200 – 270	320
46	197 – 267	300
50	195 – 265	290
54	193 – 263	280
58	191 – 261	270
61	190 – 260	260
64	188 – 258	240
66	187 – 257	220
68	186 – 256	200
69	186 – 256	190
70	185 – 255	180
mechanically adjustable	Installation height in mm for bottom ram stroke (BDC)	with maximum mould upper part weight of 60 kg

Ram surface

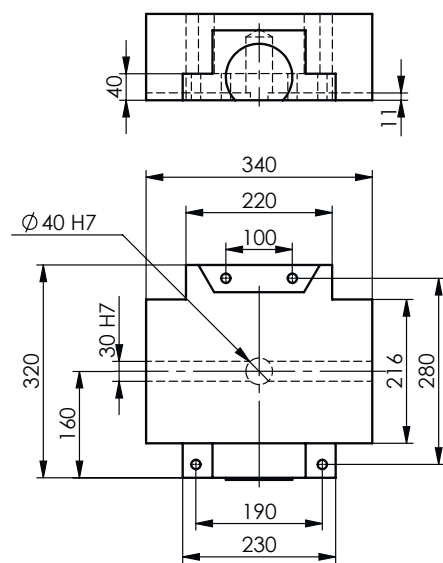

Mould mounting surface

